

DUCHESNE COUNTY MONUMENT SURVEY RECORD



T4S R8W

1/4


SEC 11 | SEC 12

U.S.B.&M.

T-21



SCALE: 1"=30'

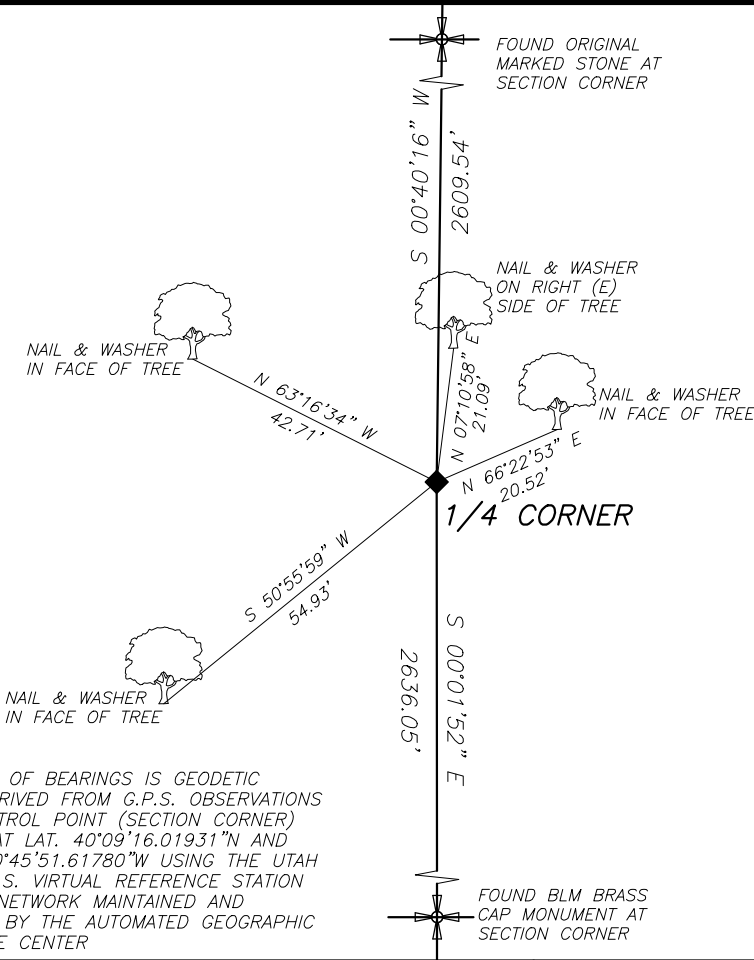

NOTE:
THE BASIS OF BEARINGS IS GEODETIC
NORTH DERIVED FROM G.P.S. OBSERVATIONS
AT A CONTROL POINT (SECTION CORNER)
LOCATED AT LAT. 40°09'16.01931"N AND
LONG. 110°45'51.61780"W USING THE UTAH
STATE G.P.S. VIRTUAL REFERENCE STATION
CONTROL NETWORK MAINTAINED AND
OPERATED BY THE AUTOMATED GEOGRAPHIC
REFERENCE CENTER


DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND ORIGINAL MARKED STONE AND BEARING
TREE AT 1/4 CORNER

USED REFERENCE NAILS AND ADJOINING
CORNERS AS REFERENCE POINTS AS SHOWN

DESCRIPTION OF MONUMENT AND ACCESSORIES
ESTABLISHED TO PERPETUATE THE ORIGINAL
LOCATION OF THE CORNER

SET 5/8"x24" REBAR WITH DUCHESNE COUNTY
2 1/2" DIA ALUMINUM CAP AT POSITION OF 1/4
CORNER WITH MARKED STONE SET ALONGSIDE

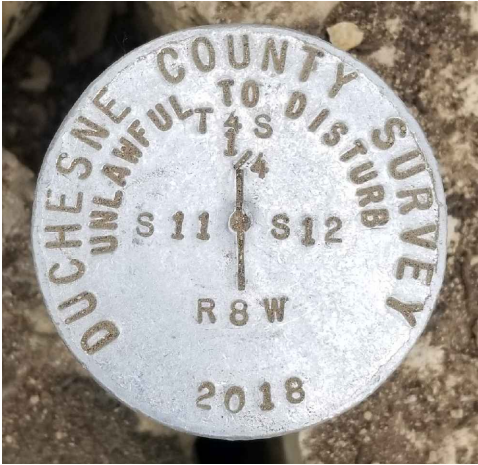

MARKINGS ON MONUMENT

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7223173.870
E: 1851350.206
NAVD88 EL: 6595.66'

LATITUDE: 40°08'49.34461" N
LONGITUDE: 110°44'43.47328" W
ELLIPSOID HEIGHT: 6542.11'
(GEOID 03 CONUS)
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300040S0080W0_600540



PHOTO OF MONUMENT FACING WEST

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do
hereby certify that I have performed or reviewed the work done on the
diagrammed corner as reported on this recordation form and approve same

Date 17 MAY '19

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

